

MAR 18 2011

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/81A (12-08)

Approved for use through 11/30/2011. OMB 0651-0035

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

PATENT - POWER OF ATTORNEY OR REVOCATION OF POWER OF ATTORNEY WITH A NEW POWER OF ATTORNEY AND CHANGE OF CORRESPONDENCE ADDRESS	Patent Number	6,347,229
	Issue Date	02/12/2002
	First Named Inventor	HELENA ZELMANOVICH
	Title	METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS
	Attorney Docket Number	10008/0026

I hereby revoke all previous powers of attorney given in the above-identified patent.

☐ A Power of Attorney is submitted herewith.

OR

☒ I hereby appoint Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s) with respect to the patent identified above, and to transact all business in the United States Patent and Trademark Office connected therewith:

93653

OR

☐ I hereby appoint Practitioner(s) named below as my/our attorney(s) or agent(s) with respect to the patent identified above, and to transact all business in the United States Patent and Trademark Office connected therewith:

Practitioner(s) Name	Registration Number

Please recognize or change the correspondence address for the above-identified patent to:

☒ The address associated with the above-mentioned Customer Number.

OR

☐ The address associated with Customer Number:

OR

☐ Firm or
Individual Name

Address

City

State

Zip

Country

Telephone

Email

I am the:

☐ Inventor, having ownership of the patent.

OR

☒ Patent owner.

Statement under 37 CFR 3.73(b) (Form PTO/SB/96) submitted herewith or filed on _____

SIGNATURE of Inventor or Patent Owner

Signature

Date

March 14, 2011

Name

VICTOR ZELMANOVICH

Telephone

516-626-7221 x225

Title and Company

EXECUTIVE VICE PRESIDENT, INTECH 21, INC.

NOTE: Signatures of all the inventors or patent owners of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ *Total of 1 forms are submitted.

This collection of information is required by 37 CFR 1.31, 1.32 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



STATEMENT UNDER 37 CFR 3.73(b)

Applicant/Patent Owner: INTECH 21, INC.

Application No./Patent No.: 6,347,229

Filed/Issue Date: 02/12/2002

Titled: METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS

INTECH 21, INC., a CORPORATION

(Name of Assignee)

(Type of Assignee, e.g., corporation, partnership, university, government agency, etc.)

states that it is:

1. ☒ the assignee of the entire right, title, and interest in:
2. ☐ an assignee of less than the entire right, title, and interest in
(The extent (by percentage) of its ownership interest is _____ %); or
3. ☐ the assignee of an undivided interest in the entirety of (a complete assignment from one of the joint inventors was made)

the patent application/patent identified above, by virtue of either:

A. ☐ An assignment from the inventor(s) of the patent application/patent identified above. The assignment was recorded in the United States Patent and Trademark Office at Reel _____, Frame _____, or for which a copy therefore is attached.

OR

B. ☒ A chain of title from the inventor(s), of the patent application/patent identified above, to the current assignee as follows:

1. From: All of the named inventors To: Intech 21, Inc. and Secure Care Products, Inc.

The document was recorded in the United States Patent and Trademark Office at
Reel 010207, Frame 0030, or for which a copy thereof is attached.

2. From: Secure Care Products, Inc. To: Intech 21, Inc.

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

3. From: _____ To: _____

The document was recorded in the United States Patent and Trademark Office at
Reel _____, Frame _____, or for which a copy thereof is attached.

☐ Additional documents in the chain of title are listed on a supplemental sheet(s).

☒ As required by 37 CFR 3.73(b)(1)(i), the documentary evidence of the chain of title from the original owner to the assignee was, or concurrently is being, submitted for recordation pursuant to 37 CFR 3.11.

(NOTE: A separate copy (i.e., a true copy of the original assignment document(s)) must be submitted to Assignment Division in accordance with 37 CFR Part 3, to record the assignment in the records of the USPTO. See MPEP 302.08)

The undersigned (whose title is supplied below) is authorized to act on behalf of the assignee.

Victor Zelmanovich
Signature

VICTOR ZELMANOVICH

Printed or Typed Name

March 14, 2011

Date

Executive Vice President

Title

ASSIGNMENT

WHEREAS, an application for a United States Patent titled **METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS** for certain inventions and discoveries was filed on August 26, 1999 and assigned U.S. Serial No. 09/383812 (the "Application");

WHEREAS, on August 26, 1999, contemporaneously with the filing of the Application, the inventors duly executed an assignment document (hereinafter the "Original Assignment") transferring all right, title, and interest in the Application and any resulting patents, including United States Patent No. 6,347,229 which issued on February 12, 2002 (hereinafter the "'229 Patent," copy of which is attached hereto as Exhibit A), to INTECH 21, INC., a corporation of New York, whose address is 15 Glen Street, Glen Cove, New York 11542 and SECURE CARE PRODUCTS, INC., a corporation of New Hampshire, whose address is 39 Chenell Drive, Concord, New Hampshire 03301-8501;

WHEREAS, said Original Assignment was duly recorded with the United States Patent and Trademark Office Assignment Division on August 26, 1999 under Reel/Frame No. 010207/0030, a copy of which is attached hereto as Exhibit B; and

WHEREAS, INTECH 21, INC., having a current place of business at 21 Harbor Park Drive North, Port Washington, NY 11050, and who, together with its successors and assigns, is hereinafter called Assignee, is desirous of acquiring the title, rights, benefits, and privileges hereinafter recited,

NOW, THEREFORE, for valuable consideration furnished by Assignee to SECURE CARE PRODUCTS, INC., receipt and sufficiency of which is hereby acknowledged, SECURE CARE PRODUCTS, INC., hereby, without reservations:

1. Assigns, transfers, and conveys to Assignee its entire right, title, and interest in and to the '229 Patent and the inventions and discoveries therein and any and all reissues, and extensions thereof.
2. Authorize and request the Commissioner of Patents and Trademarks of the United States of America and the empowered officials of all other governments to issue or transfer the '229 Patent to Assignee, as assignee of the entire right, title, and interest therein or otherwise as Assignee may direct.
3. Warrant that it has not conveyed to others any right, title, or interest in said '229 Patent or any license to use the same or to make, use, or sell anything embodying or utilizing any of said '229 Patent; that it has good right to assign the same to Assignee without encumbrance; and that it is aware of no claim to the contrary.
4. Bind its heirs, legal representatives, and assigns, as well as itself, to do, upon Assignee's request and at Assignee's expense, but without additional consideration to assignor, all acts reasonably serving to assure that said '229 Patent, shall be held and enjoyed by Assignee as fully and entirely as the same could have been held and enjoyed by assignor, its heirs, legal representatives, and assigns if this assignment had not been made; and particularly to execute and deliver to Assignee all lawful application documents including petitions, specifications, and oaths, and all assignments, disclaimers, and lawful affidavits in

form and substance as may be requested by Assignee; to communicate to Assignee all facts known to assignor relating to said '229 Patent or the history thereof; to furnish Assignee with any and all documents, photographs, models, samples, and other physical exhibits in assignor's control or in the control of its heirs, legal representatives, or assigns which may be useful for establishing the facts of conception, disclosure, and reduction to practice of said inventions and discoveries covered by the '229 Patent; and to testify to the same in any interference, arbitration, or litigation.

The undersigned authorized signer, on behalf of SECURE CARE PRODUCTS, INC., its beneficiaries, heirs, successors and assigns, hereby certifies, represents and warrants that he or she has full authority to sign this document on behalf of SECURE CARE PRODUCTS, INC. and to bind SECURE CARE PRODUCTS, INC. to the terms of this assignment.

IN TESTIMONY WHEREOF, I have hereunto set my hand and seal this 14 day of March, 2011.

SECURE CARE PRODUCTS, INC.

A handwritten signature in black ink, appearing to read 'Albert Larose', written over a horizontal line.

Name: Albert Larose

Title: Director of Engineering

EXHIBIT A



US006347229B1

(12) **United States Patent**
Zelmanovich et al.

(10) **Patent No.:** US 6,347,229 B1
(45) **Date of Patent:** Feb. 12, 2002

(54) **METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS**

(75) **Inventors:** Helena Zelmanovich; Victor Zelmanovich, both of Deer Park, NY (US); George Bilenko, Stamford, CT (US)

(73) **Assignees:** Intech 21, Inc., Glen Cove, NY (US); Secure Care Products, Inc., Concord, NH (US)

(*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) **Appl. No.:** 09/383,812

(22) **Filed:** Aug. 26, 1999

(51) **Int. Cl.⁷** H04Q 7/20

(52) **U.S. Cl.** 455/456; 455/562

(58) **Field of Search** 455/456, 457, 455/562, 139, 132, 440, 522, 423; 342/450

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,728,959 A * 3/1988 Maloney 342/457
5,973,643 A * 10/1999 Hawkes 342/457

5,991,284 A * 11/1999 Willenaggar 370/335
6,026,304 A * 2/2000 Hilsenrath 455/456
6,026,305 A * 2/2000 Salinger 455/456
6,047,192 A * 4/2000 Maloney 455/456
6,091,956 A * 7/2000 Hollenberg 455/456
6,163,696 A * 12/2000 Bi 455/436
6,167,275 A * 12/2000 Oros 455/456
6,208,297 B1 * 3/2001 Fattouche 342/450
6,233,459 B1 * 3/2001 Sullivan 455/456
6,252,867 B1 * 6/2001 Pfeil 370/335

* cited by examiner

Primary Examiner—Daniel Hunter


Assistant Examiner—Nick Corsaro

(74) *Attorney, Agent, or Firm*—Ira J. Schaefer, Esq.; Clifford Chance Rogers & Wells LLP

(57) **ABSTRACT**

A method for tracking the location of mobile units, comprises providing a plurality of mobile units each having a wireless transmitter and a unique address and at least one stationary base unit having a phase array antenna with antenna elements. A signal including an address is received from at least one mobile unit by the at least base unit via the phase array antenna. The phase difference of the signal arriving at the antenna elements from each mobile unit is measured and the coordinates of the location of each mobile unit are calculated as a function of the phase differences.

21 Claims, 6 Drawing Sheets

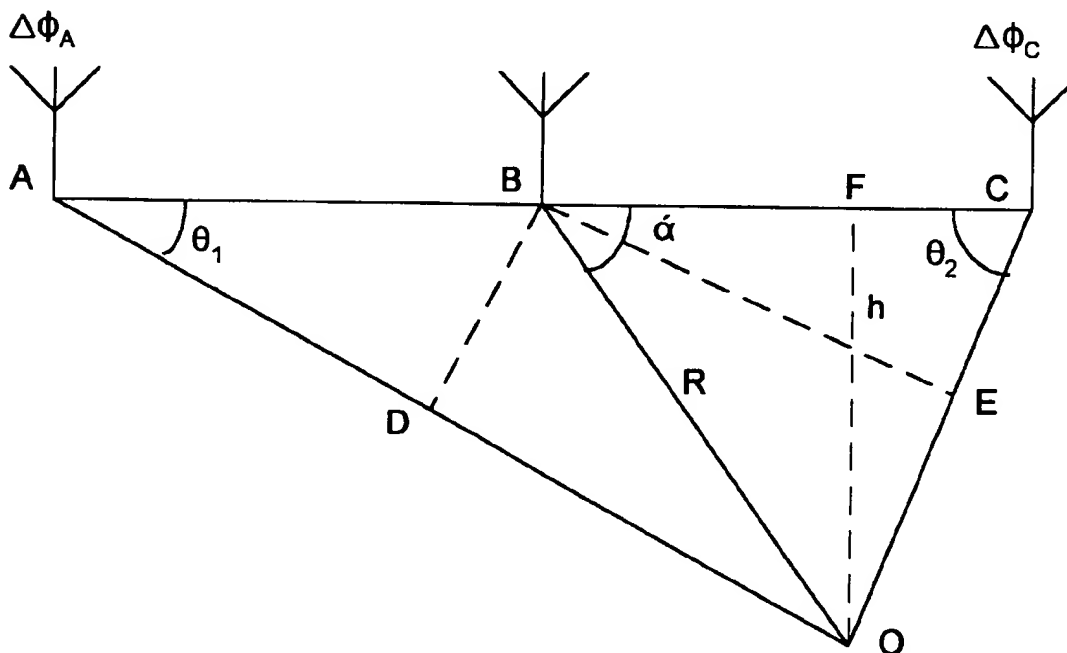

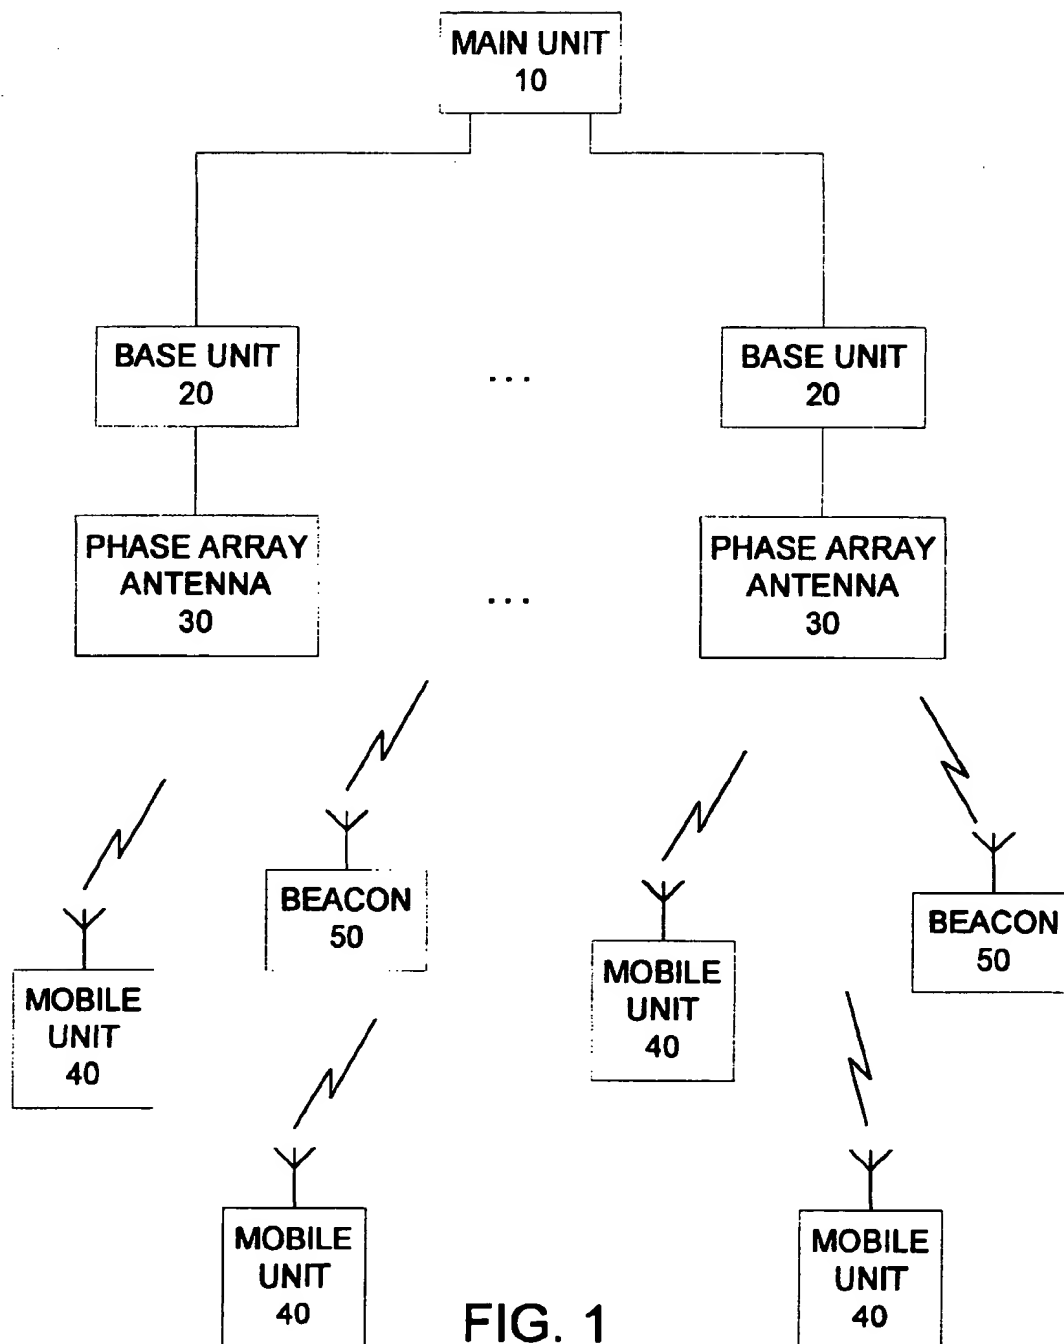


FIG. 1

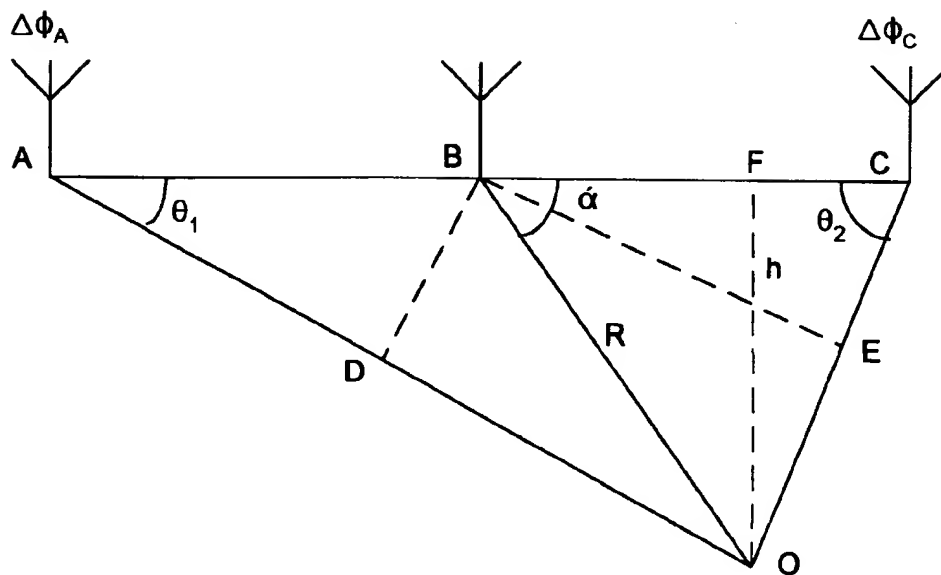


FIG. 2A

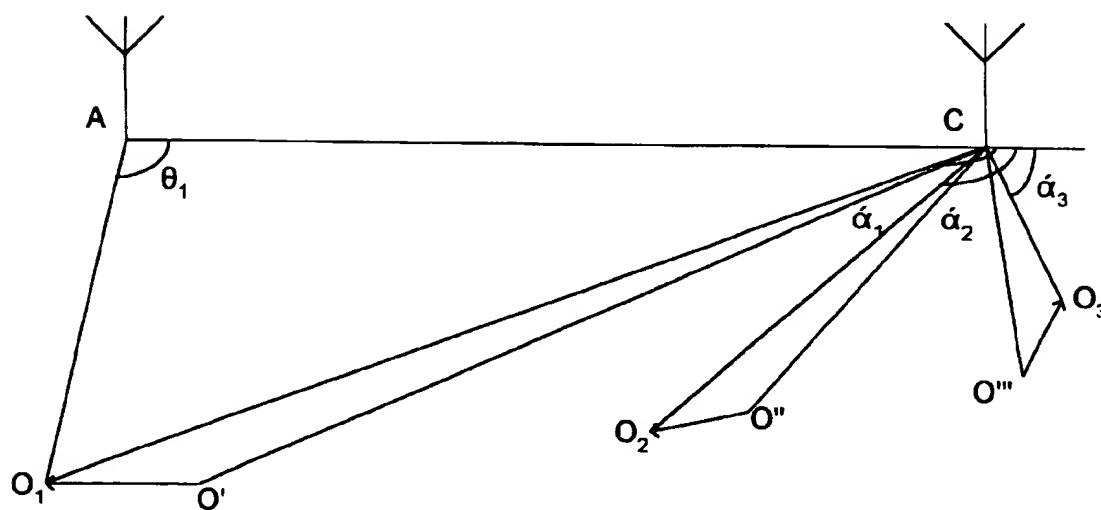


FIG. 3

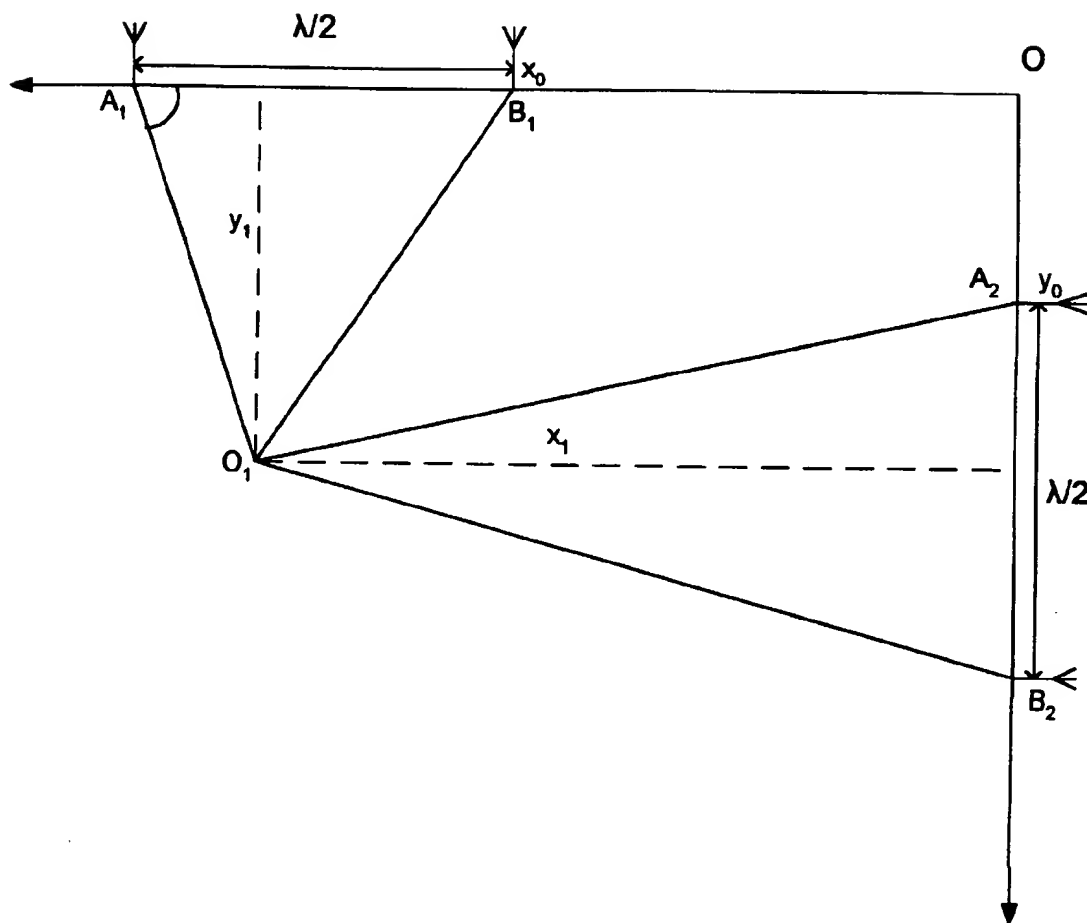


FIG. 2B

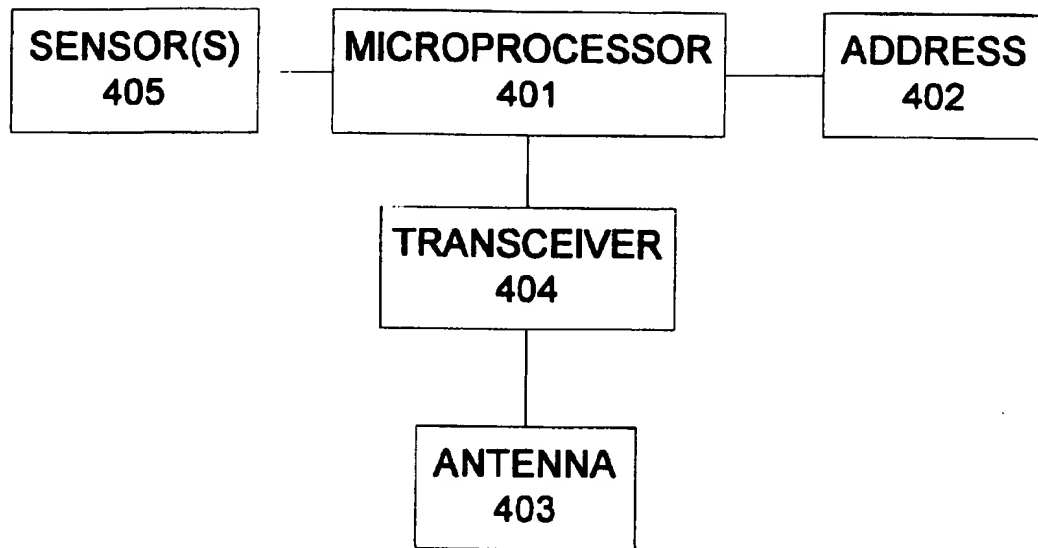


FIG. 4

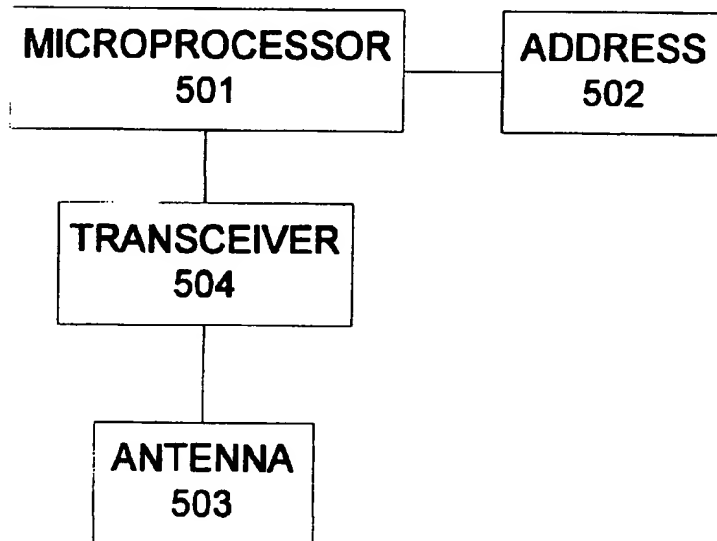


FIG. 5

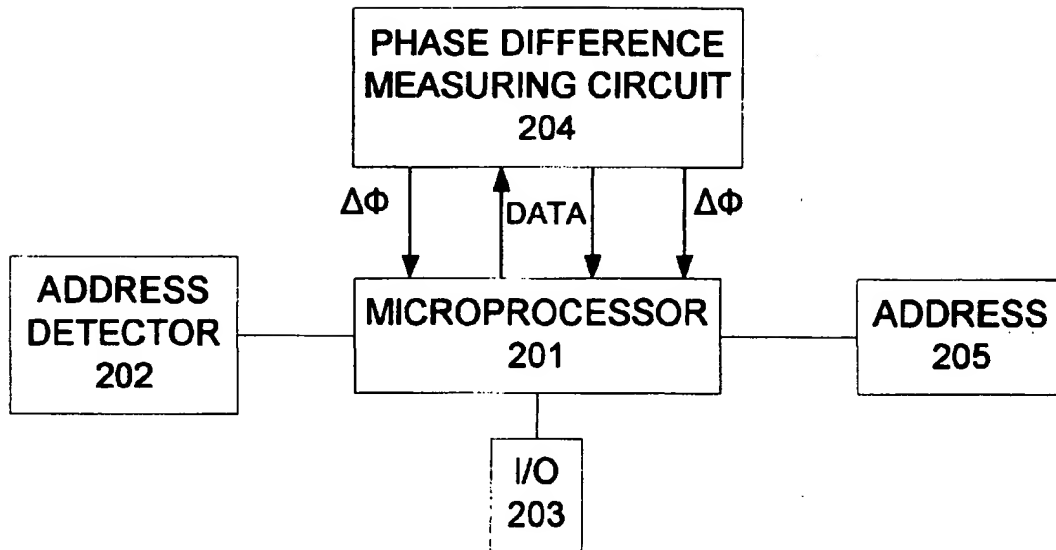


FIG. 6

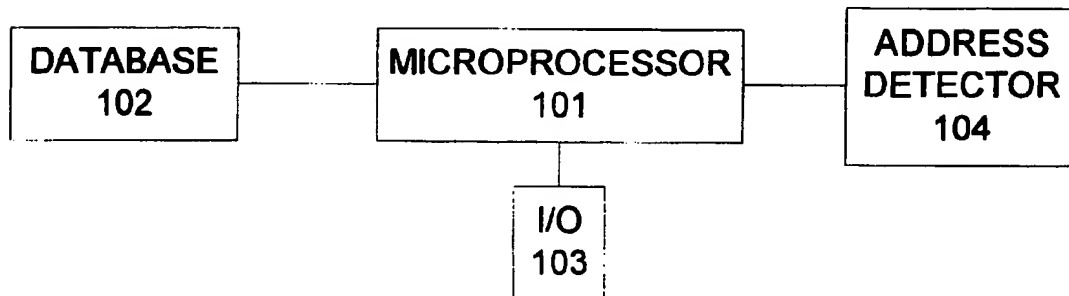


FIG. 7

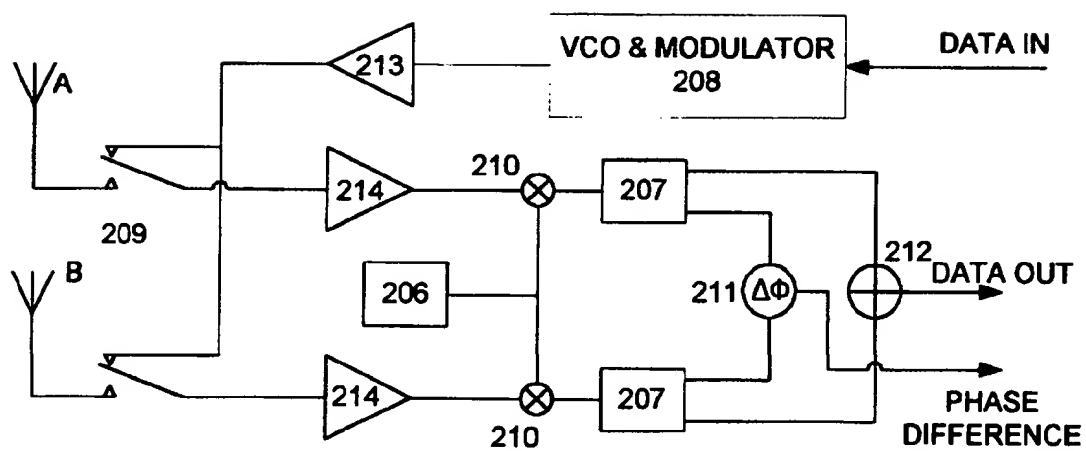


FIG. 8

1

METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS

BACKGROUND OF THE INVENTION

The present invention relates to a method for tracking the location of mobile units.

There is currently a great need for the tracking of the location of mobile units, particularly wireless transmitters or transceivers that are worn or carried on a person, so as to keep track of that person's location. The mobile units also can have sensors which sense voltage, temperature, vital signs, etc., and thus it is also important for the mobile unit to be able to transmit this information under adverse conditions.

Many problems arise from the use of such units, particularly where many units are present in a given area, and there is a need to accurately identify each individual unit, as well as to accurately identify the location of the unit.

SUMMARY OF THE INVENTION

The main object of the present invention is to provide a method for tracking the location of mobile units which is achieved by calculating the coordinates of the location of a mobile unit with a unique identification.

Another object of the present invention is to calculate the coordinates of the location of each mobile unit by measuring the phase difference of signals arriving at antenna elements of a phase array antenna at the base unit from a mobile unit.

Preferably, measuring of the phase difference is performed in the base unit, whereas the step of calculating the coordinates is performed in a main unit connected to the base unit and comprising a programmable computer, for example, an Intel Pentium II based personal computer having a Windows 98 operating system, or any kind of programmable computer system.

Each mobile unit may have one or more sensors, and the signal that is received from the mobile unit includes information or an information signal, may include an output from the sensor and a mobile unit address (identification number). The information from the sensor is processed preferably by the main unit.

The wireless transmitter or transceiver used in the mobile unit is preferably a radio frequency transmitter, and more preferably, a radio frequency transceiver.

Another object of the present invention is to improve the tracking method by a method for calibrating a system for tracking the location of mobile units.

Still another object of the present invention is to improve the accuracy of the location tracking by providing two or more base units disposed at a predetermined position apart from each other and measuring the azimuth of the signal received from each mobile unit at the antenna elements of the base units.

In accordance with the present invention, the base unit or phase difference measurement and communication unit (PDMCU) has the phase array antenna for receiving signals from a plurality of mobile wireless transmitter units or portable wireless interfaces (PWI) and at least one reference wireless transmitter or beacon is disposed at a fixed location. The beacon is at a known location with regard to the base unit and has a unique identifying address which identifies it as a beacon or reference unit.

A signal including the address is received from the beacon at the base unit via the phase array antenna. The phase

2

difference between the signal arriving at the antenna elements from the beacon is measured and the coordinates of the location of the beacon are then calculated. Future calculations can then be corrected by the difference between the calculated coordinates of the beacon and the actual location of the beacon. Thus, when calculations are performed thereafter for mobile units, similar corrections can be performed to the calculated coordinates in order to find the actual location of those mobile units.

To further increase accuracy of the location detection, a plurality of base units can be used. In this case, the locations of the base units are known and each base unit will measure the azimuth direction of the mobile unit.

These and other objects and advantages of the present invention are achieved in accordance with the present invention disclosed in detail hereinafter with reference to the attached drawings, wherein

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of the system for carrying out the method of the present invention;

FIG. 2A is a drawing showing the method for calculating the polar coordinates;

FIG. 2B is a drawing showing the method for calculating the X, Y coordinates;

FIG. 3 is a drawing showing the calculation of the calibration corrections;

FIG. 4 is a block diagram of the mobile units of FIG. 1;

FIG. 5 is a block diagram of the beacon of FIG. 1;

FIG. 6 is a block diagram of the base units of FIG. 1;

FIG. 7 is a block diagram of the main unit of FIG. 1; and

FIG. 8 is a drawing of a phase difference measurement circuit in the base unit.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to FIG. 1, a system is shown for carrying out the method of the present invention for the detection of the location and identification of mobile units 40 by the use of a phase array antenna 30.

The system may have a single base unit 20, but preferably has a plurality of addressable base units each with antenna elements in a phase antenna array 30. The base unit receives a signal from a mobile unit or beacon 50 at each antenna element. There will be a resulting phase difference and the function of the base unit is to measure the phase difference and communicate it to main unit 10. The function of the main unit is to process information from the base units and mobile units and communicate the information. The base units 20 are connected to the main unit or computation and communication module 10 in a hard-wired manner as shown in FIG. 1 or through a wireless connection. Moreover, while the base units 20 are shown to be connected in parallel, they can also be connected via a network to the main unit 10. While a single main unit is shown, it is understood that the system can include a plurality of main units each having base units connected thereto. In the various system configurations that have been described, each base unit has a unique address that is sent to the main unit with all transmissions and this unique address also permits each base unit to be addressable by the main unit.

The main unit 10 is preferably a programmed microcomputer, such as an Intel Pentium II based computer having Windows 98 operating system plus a network con-

troller module which serves as an interface between the base units and the computer.

The base unit comprises a circuitry for measuring the phase difference of the signals arriving from the mobile units 40 or from a beacon 50, as well as having circuitry for information data detection from each mobile unit 40 or beacon 50. The base units 20 also have the ability to communicate with the main unit 10, either by means for of a driver along a hard-wire line or by means of a radio transceiver for wireless communication.

The system also includes the aforementioned mobile or portable wireless interface units 40 of which any number can be used, as long as each has a unique address which it is capable of communicating to the base units 20. The mobile units include a transmitter, preferably a radio frequency transceiver, as well as any number of a set of sensors that can be used to make telemetry readings. The outputs of the sensors are communicated via the transmitters to base units and thereafter to the main unit so as to be processed therein.

The main unit 10, which is preferably a computation and communication module, as noted above, comprises a programmed personal computer and utilizes software for the portable wireless interface unit location calculation and database management for storing the sensor readings, along with the locations for each mobile unit 40.

The system also includes beacons 50 which are fixed location wireless transmitters or transceivers, whose location relative to the phase array antenna of the base units 20 are known to the main unit 10. The system can use one or more beacons 50, depending upon the environment, that is, if the signals therefrom would be blocked from the various phase array antennas 30.

In accordance with the invention, once there is a measurement in the base unit 20 of the phase difference of the signal received from a mobile unit 40, the main unit 10 will calculate the coordinates of the location and process the data from the sensors.

The method according to the present invention combines the location and identification of any mobile unit by using multiple phase array antennas and transfers the collected information to an information management system in the main unit which can also collect and process the information from sensors attached to the mobile units 40.

Referring now to FIG. 2A, the calculation of the polar coordinates R, α of a tracked object is explained using the phase array antenna in a radio frequency identification type system.

As shown in FIG. 2A, O is the tracked object with a transmitter or transceiver and A, B and C are antenna elements. It has been found that the location can be determined by using just two antenna elements when at least two base units are used.

The base unit 20 measures the phase difference of points A, C relative to point B ($\Delta\Phi_A$, $\Delta\Phi_C$) electronically at points A and C respectively.

In accordance with the invention, the antenna elements can be positioned in such a way that, for example, $\lambda/2$ or any needed distance for a particular application. For example

$$AB=BC=\lambda/2 \text{ or}$$

$$AB=BC=\lambda$$

or any other desired value.

As a result

$$\Delta\Phi_A = \frac{2\pi AD}{\lambda}$$

$$\Delta\Phi_C = \frac{2\pi EC}{\lambda}$$

From these equations, if Φ_A and Φ_C are known, then the angles θ_1 and θ_2 can be calculated, as we can see from the following example.

If we assume that

$$AB=BC=\lambda$$

$$\lambda \ll OB$$

$$\lambda \ll OA$$

$$\lambda \ll OC$$

$$\Delta\Phi_A = 90^\circ = \pi/2$$

then

$$AD = \frac{\Phi_A \lambda}{2\pi} = \frac{\lambda}{4}$$

$$\cos\theta_1 = \frac{AD}{AB} = \frac{\lambda}{4\lambda} = \frac{1}{4}$$

$$\theta_1 = 75.5^\circ$$

Once angles θ_1 and θ_2 are known, then

$$OF=h$$

$$FC=x$$

$$AF=2\lambda-x$$

$$h=x \tan \theta_2$$

$$h=(2\lambda-x) \tan \theta_1$$

$$x \tan \theta_2 = 2\lambda \tan \theta_1 - x \tan \theta_1$$

$$x(\tan \theta_1 + \tan \theta_2) = 2\lambda \tan \theta_1$$

$$x = \frac{2\lambda \tan \theta_1}{\tan \theta_1 + \tan \theta_2}$$

$$h=x \tan \theta_2$$

$$h = \frac{2\lambda \tan \theta_1 \tan \theta_2}{\tan \theta_1 + \tan \theta_2}$$

Then the radius vector R can be determined as follows

$$R=OB=\sqrt{(\lambda-x)^2+h^2}$$

$$R=OB=\sqrt{(\lambda-x)^2+h^2}$$

$$\tan \alpha = \frac{h}{\lambda-x}$$

The polar coordinates R, α define the exact location of a tracked object at any given moment in time.

Multiple base units can measure the azimuth of the same mobile unit from different locations and transmit this information to the main unit. In this case, the main unit can provide better accuracy of the location coordinates for the mobile units.

The coordinate calculations for an object position using two phase array antennas, each with two antenna elements when the distance between the elements is $\lambda/2$ is now explained with the help of FIG. 2B.

5

The following are known: $B_1(x_0, O)$, $A_2(O, y_0)$, θ_1 , θ_2 . The problem is to find $O_1(x_1, y_1)$.

$$\begin{aligned} \frac{y_1}{\frac{\lambda}{2} - (x_1 - x_0)} &= \tan \theta_1 \\ y_1 &= \left(\frac{\lambda}{2} - x_1 + x_0 \right) \tan \theta_1 \\ y_1 &= \left(\frac{\lambda}{2} + x_0 \right) \tan \theta_1 - x_1 \tan \theta_1 \\ \frac{x_1}{y_0 - y_1} &= \tan \theta_2 \\ x_1 &= (y_0 - y_1) \tan \theta_2 \\ x_1 &= y_0 \tan \theta_2 - y_1 \tan \theta_2 \\ y_1 &= \left(\frac{\lambda}{2} + x_0 \right) \tan \theta_1 - y_0 \tan \theta_1 \tan \theta_2 + y_1 \tan \theta_1 \tan \theta_2 \\ y_1 &= \frac{\tan \theta_1 \left(\frac{\lambda}{2} + x_0 - y_0 \tan \theta_2 \right)}{1 - \tan \theta_1 \tan \theta_2} \\ x_1 &= \tan \theta_2 \left\{ y_0 - \frac{\tan \theta_1 \left(\frac{\lambda}{2} + x_0 - y_0 \tan \theta_2 \right)}{1 - \tan \theta_1 \tan \theta_2} \right\} \end{aligned}$$

The last two equations represent the coordinates of the tracked object O_1 by using two phase array antennas and are expressed through given quantities x_0 , y_0 , θ_1 , θ_2 .

FIG. 3 shows how the beacon 50 can be used for the calibration of the radio frequency identification system.

One or more beacons are positioned in a constant position, so that the exact locations, that is, their coordinates, are defined by the needed application and are known. In this example the polar coordinates are used, but it is understood that it is equally applicable to other coordinates.

O_1 and O_2 and O_3 are the actual positions of the beacon, whereas O' , O'' and O''' are points from which the electronic signals were calculated as being received.

A number of electronic measurements are taken for the position of the beacon. They are then averaged, and then one calculates the average of ΔO_1 , ΔO_2 and ΔO_3 and the final average ΔO will be used for calibration and accounted for in $\Delta \Phi_A$ and $\Delta \Phi_B$.

BEACON AT	R_{BEACON}	α_{BEACON}	SIGNAL FROM	DISPLACEMENT VECTOR
O_1	R_1	α_1	O'	$\hat{O}O_1 = \Delta O_1$
O_2	R_2	α_2	O''	$\hat{O}O_2 = \Delta O_2$
O_3	R_3	α_3	O'''	$\hat{O}O_3 = \Delta O_3$

FIG. 4 shows the details of the mobile unit 40. The unit includes a microprocessor 401 which receives inputs from one or more sensors 405 and which has a hard-wired address 402 which is unique and which is received by the microprocessor 401.

The microprocessor 401 controls transceiver 404 which communicates via antenna 403 with the base units 20. The microprocessor 401 controls the transceiver so as to transmit the sensor information, along with the address information, and to receive polling information from the base units 20.

The details of the beacon 50 are shown in FIG. 5. The beacon 50 includes a microprocessor 501 which receives, as an input, a unique address from 502 which identifies the beacon as a reference source, as opposed to a portable wireless interface unit 40. The microprocessor 501 controls the transceiver 504 to transmit a reference signal, along with

6

the address, via antenna 503. The beacon can also have a sensor connected to it.

The transceivers 404 and 504 can be an RFM TR3001 transceiver, a Linx TXN-315-LC transmitter of comparable device from Motorola, Airtel, Intellon or Proxim. Microprocessors 401 and 501 can be conventional Intel, Motorola microprocessors or others.

The sensors 405 can sense telemetry information such as current, flow, leakage, motion, pressure, smoke, temperature, vibration, vital signs, and voltage.

FIG. 6 shows the details of the base unit 20. This unit is controlled by a microprocessor 201 which receives, for example, the phase difference signals $\Delta \Phi_A$ and $\Delta \Phi_C$ from phase difference measurement circuit 204. The signals, along with the address data, are processed by the microprocessor which sends the address data to the address detector 202 to determine the source of the signal. The base unit also has a unique address which is stored in 205 and which is sent along with data to the main unit. The microprocessor 201 communicates with the main unit 10 via the I/O 203. The I/O 203 can be either a UART for transmitting asynchronous data to the main unit 10, either in parallel, as shown in FIG. 1, or via a network, or it can be a transceiver transmitting the information including the address to and from the main unit via wireless communication.

FIG. 7 illustrates the main unit 10. The main unit 10, as noted above, can be a programmed microcomputer, including a microprocessor 101 and an I/O 103 which is managing the wired or wireless network with I/O 203 of the base unit 20. The main unit 10 also includes a database 102 in which the information from the sensors is stored, along with the location and identification of each mobile unit. The main unit has an address detector 104 which determines which base unit it is receiving data from. Microprocessors 101 and 201 can be conventional Intel, Motorola microprocessors or others.

FIG. 8 illustrates the phase difference measurement circuit 204 that is used to measure each phase difference. In the circuit shown, two antenna elements A and B are used and the phase difference $\Delta \phi$ is measured and sent to microprocessor 201. The circuit has a voltage controlled oscillator and modulator 208 which is a surface acoustic wave or phase lock loop based. Data from the main unit 10 used to poll the mobile unit or beacon is input and passed through amplifier 213 to switch 209 which connects the signal to antenna elements A and B for transmission to the mobile units and/or beacons.

When a signal is received at the antenna elements A and B, the switch 209 is set in the receive position and the signals are passed through low noise amplifiers 214 to mixers 210 where the signals are mixed with an output from local oscillator 206, which is a surface acoustic wave or phase lock loop based oscillator by Temic or Atmel. The output of the mixers is received by intermediate frequency receivers 207 which are for example NE605 by Philips. The data demodulated from the signals are combined at 212 to improve gain and constitute the data out signal sent to the microprocessor 201. The directional signals are fed to phase difference detector 211 which is a 74HCT9046. The output is the phase difference sent to microprocessor 201.

It is understood that the embodiments described hereinabove are merely illustrative and are not intended to limit the scope of the invention. It is realized that various changes, alterations, rearrangements and modifications can be made by those skilled in the art without substantially departing from the spirit and scope of the present invention.

7

What is claimed is:

1. A method for continuous tracking the location of mobile units, comprising the steps of:

providing at least one mobile unit having a wireless transceiver and a unique address;

providing at least one stationary base unit having a phase array antenna with three or more single antenna elements, where said stationary base unit periodically polls said at least one mobile unit to trigger transmission of at least one signal from said mobile unit to said stationary base unit;

receiving said signal, including an address from said mobile unit at said stationary base unit via said phase array antenna;

measuring the phase difference of said signal arriving at said three or more antenna elements of said phase array antenna;

performing calculations by expressing the phase difference at a plurality of points of location of said antenna elements of said stationary base unit relative to at least one other point of location of another antenna element of the same stationary base unit; and

determining the location of each at least one mobile unit using a single one of the at least one stationary unit by determining azimuths of each mobile unit from the phase differences at a plurality of points of said single antenna elements of the single base unit and calculating the polar coordinates of intersections of the azimuths.

2. The method according to claim 1, further comprising a step of transmitting said calculated coordinates of said mobile unit from said at least one stationary base unit to a main unit.

3. The method according to claim 2, further comprising a step of adjusting said calculated coordinates of said mobile unit using an environmental data.

4. The method according to claim 3, wherein said environmental data comprises a floor plan.

5. The method according to claim 2, further comprising a step of adjusting said calculated coordinates of said mobile unit using a location coordinates of said mobile calculated by a different stationary base unit.

6. The method according to claim 2, wherein said transmission of said calculated coordinates is wireless.

7. The method according to claim 2, wherein said main unit is connected to said at least one stationary base unit.

8. The method according to claim 1, wherein the calculations are performed in a stationary base unit.

9. The method according to claim 2, wherein the calculations are performed in a main unit.

10. The method according to claim 2, wherein each mobile unit has at least one sensor and a signal transmitted to said main unit includes an information signal from said sensor, and wherein the information signal is processed by said main unit.

11. The method according to claim 1, further comprising a step of providing at least one wireless portable reference transceiver disposed at a fixed location and having a unique identifying address and calibrating the accuracy of the calculation of the coordinates of at least one mobile unit using the known location of said portable reference transceiver.

12. The method according to claim 11, wherein the step of calibrating comprises

measuring the phase difference between the signal arriving at each of a plurality of antenna element from at least one portable reference transceiver;

8

performing calculations at said stationary base unit by expressing the phase difference at a plurality of points of location of said antenna elements of said stationary base unit relative to at least one other point of location of another antenna element of the same stationary base unit;

determining from said phase differences the coordinates of location of said portable reference transceiver; and correcting future calculations of the coordinates of at least one mobile unit by the difference between the calculated coordinates of said portable reference transceiver and the actual location of said portable reference transceiver.

13. The method according to claim 12, wherein said portable reference transceiver has at least one sensor.

14. A method for calibrating a system for continuous tracking the location of mobile units, comprising the steps of:

providing at least one stationary base unit with a phase array antenna having antenna elements for receiving signals from a plurality of mobile wireless transceiver units and at least one wireless portable reference transceiver disposed at a fixed location and having a unique identifying address;

receiving a signal including an address from said wireless portable reference transceiver at said stationary base unit via a phase array antenna;

measuring the phase difference of said signal arriving at a plurality of antenna elements of said phase array antenna;

performing calculations by expressing the phase difference at a plurality of points of location of said antenna elements of said stationary base unit relative to at least one other point of location of another antenna element of the same stationary base unit;

determining from said phase differences the coordinates of location of said portable reference transceiver; and correcting future calculations of the coordinates of the mobile wireless transceiver units by the difference between the calculated coordinates of said portable reference transceiver and the actual location of said portable reference transceiver.

15. The method according to claim 14, wherein at least one stationary base unit periodically polls at least one mobile unit to initiate a signal transmission from said mobile unit to said stationary base unit.

16. The method according to claim 14, wherein the coordinates of location of said mobile unit are expressed as polar coordinates.

17. The method according to claim 14, further comprising a step of transmitting said calculated coordinates of location of said wireless portable reference transceiver from said stationary base station to a main unit.

18. The method according to claim 17, wherein said transmission of said calculated coordinates is wireless.

19. The method according to claim 17, wherein said main unit is connected to said at least one stationary base unit.

20. The method according to claim 14, wherein the step of performing calculations by expressing the phase difference at a plurality of points of location of said antenna elements of said stationary base unit relative to at least one other point of location of another antenna element of the same stationary base unit and the step of determining from said phase differences the coordinates of location of said wireless portable reference transceiver are performed in a stationary base unit.

9

21. The method according to claim 17, wherein the step of performing calculations by expressing the phase difference at a plurality of points of location of said antenna elements of said stationary base unit relative to at least one other point of location of another antenna element of the

10

same stationary base unit and the step of determining from said phase differences the coordinates of location of said wireless reference transceiver are performed in a main unit.

* * * * *

EXHIBIT B

ASSIGNMENT

WHEREAS, we, Helena Zelmanovich, being a citizen of the United States, residing at 18 Stevenson Place, Deer Park, NY 11729; Victor Zelmanovich, being a citizen of the United States, residing at 18 Stevenson Place, Deer Park, NY 11729; and George Bilenko, being a citizen of the United States, residing at 212 Wardwell Street, Stamford, CT 06902, are the inventors of certain new and useful inventions and discoveries, for which we have made an application for Letters Patent entitled "METHOD FOR TRACKING THE LOCATION OF MOBILE UNITS," a declaration for which is being executed on an even day herewith; and

WHEREAS, Intech 21, Inc., a corporation of New York, whose address is 15 Glen Street, Glen Cove, NY 11542, and Secure Care Products, Inc., a corporation of New Hampshire, whose address is 39 Chenelle Drive, Concord, NH 03301-8501, and which, together with their respective successors and assigns are hereinafter called "ASSIGNEE," are desirous of acquiring the title, rights, benefits, and privileges hereinafter recited;

NOW, THEREFORE, for and in consideration of good and valuable consideration furnished by ASSIGNEE to us, receipt and sufficiency of which we hereby acknowledge, we hereby, without reservations:

1. Assign, transfer, and convey to ASSIGNEE the entire right, title, and interest in and to said inventions and discoveries, said application for Letters Patent, any and all other applications for Letters Patent on said inventions and discoveries in whatsoever countries, including all divisional, renewal, substitute, continuation, continuation-in-part, and convention applications based in whole, or in part, upon said inventions or discoveries, or upon said applications, and any and all Letters Patents, reissues, and extensions of Letters Patent granted for said inventions and discoveries or upon said applications, and every priority right that is or may be predicated upon, or arise from, said inventions, said discoveries, said applications, and said Letters Patent;
2. Authorize ASSIGNEE to file patent applications in any or all countries on any or all of said inventions and discoveries in our names or in the name of ASSIGNEE or otherwise as ASSIGNEE may deem advisable, under International Conventions or otherwise;
3. Authorize and request the Commissioner of Patents and Trademarks of the United States of America and the empowered officials of all other governments throughout the world to issue or transfer all said Letters Patents to ASSIGNEE, as assignee of the entire right, title, and interest therein or otherwise as ASSIGNEE may direct;
4. Warrant that we have not knowingly conveyed to others any right in said inventions, discoveries, applications, or patents, or any license to use the same, or to make, use, sell, offer to sell, or import anything embodying or utilizing any of said inventions or discoveries; and that we have good right to assign the same to ASSIGNEE without encumbrance;
5. Bind our heirs, legal representatives, and assigns, as well as ourselves, to do, upon ASSIGNEE's request and at ASSIGNEE's expense, but without additional consideration to us or them, all acts reasonably serving to assure that said inventions and discoveries, said patent applications, and said Letters Patents shall be held and enjoyed by ASSIGNEE as fully and entirely as the same could have been held and enjoyed by us, our heirs, legal representatives, and assigns if this Assignment had not been made; and particularly to execute and deliver to ASSIGNEE all lawful application documents including petitions, specifications, and oaths, and all assignments, disclaimers, and lawful affidavits in form and substance as may be requested by ASSIGNEE; and to communicate to ASSIGNEE all facts known to us relating to said inventions

and discoveries or the history thereof, and to testify as to the same in any court or proceeding; and to furnish ASSIGNEE any and all documents, photographs, models, samples, and other physical exhibits in our control or in the control of our heirs, legal representatives, or assigns which may be useful for establishing the facts of our conceptions, disclosures, and reduction to practice of said inventions and discoveries.

IN TESTIMONY WHEREOF, we have hereunto set our hand and seal.

Helena
Helena Zelmanovich

Date: 8.26.99

WITNESSED BY:

JOSEPH J. ADINOLFI
Name [Signature]
7 SPARRE CT., SAUGHTON, NY
Address

George Bilenko
George Bilenko

Date: 8-26-99

WITNESSED BY:

JOSEPH J. ADINOLFI
Name [Signature]
7 SPARRE CT., SAUGHTON, NY
Address

Victor Zelmanovich
Victor Zelmanovich

Date: 8.26.99

WITNESSED BY:

JOSEPH J. ADINOLFI
Name [Signature]
7 SPARRE CT., SAUGHTON, NY
Address